




NACHI BEARINGS TRAINING INDUSTRY

INA PASE60-N bearing units

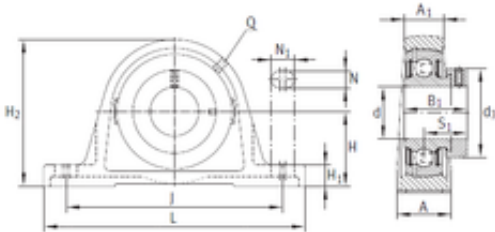

PASE60-N Bearing 2D drawings and 3D CAD models

Bearing No. PASE60-N

Bore Diameter	60 mm
d	60 mm
S1	39,6 mm
Thread (Q)	Rp1/8
d3	84 mm
A	60 mm
A1	42 mm
B1	53,1 mm
H	69,9 mm
H1	25 mm
H2	140 mm
J	190 mm
L	240 mm
N	18 mm
N1	28 mm
Weight	4,35 Kg
Basic dynamic load rating (C)	52 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	5.209
EAN	4012802838121
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar



NACHI BEARINGS TRAINING INDUSTRY

Housing Style	2 Bolt Pillow Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GRAE60NPPB
Seals	Double Lip Contact
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row Spherical Standard Shaft Height With Set Screw
Long Description	2 Bolt Pillow Block; 60MM Bore; 70MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 177MM Minimum Bolt Spacing; 201.5MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Lip Contac
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	PASE60N
Weight / LBS	12.348
Length Thru Bore	2.091 Inch 53.1 Millimeter
Bolt Spacing Minimum	6.969 Inch 177Millimeter
Bore	2.362 Inch 60 Millimeter
Base to Center Height	2.756 Inch 70 Millimeter
Nominal Bolt Center to Center	7.5 Inch 190 Millimeter



NACHI BEARINGS TRAINING INDUSTRY

Bolt Spacing Maximum	7.933 Inch 201.5Millimeter
Actual Bolt Center to Center	0 Inch 0Millimeter