




NACHI BEARINGS TRAINING INDUSTRY

INA TASE80 bearing units

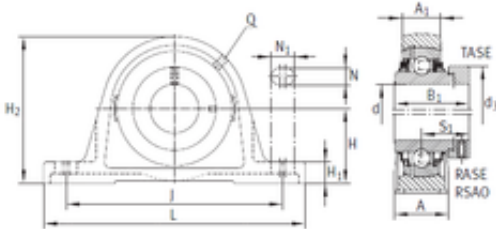

TASE80 Bearing 2D drawings and 3D CAD models

Bearing No. TASE80

Bore Diameter	80 mm
d	80 mm
S1	47,6 mm
Thread (Q)	Rp1/8
d3	108 mm
A	78 mm
A1	55 mm
B1	71 mm
H	89 mm
H1	30 mm
H2	175 mm
J	232 mm
L	290 mm
N	26 mm
N1	34 mm
Weight	8,49 Kg
Basic dynamic load rating (C)	72 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	10.358
EAN	4012802818567
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar



NACHI BEARINGS TRAINING INDUSTRY

Housing Style	2 Bolt Pillow Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GE80KPPB3
Seals	Double Triply
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row Standard Shaft Height With Set Screw
Long Description	2 Bolt Pillow Block; 80MM Bore; 88.9MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 224MM Minimum Bolt Spacing; 240MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Triply; No
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	TASE80
Weight / LBS	19.073
Actual Bolt Center to Center	0 Inch 0Millimeter
Nominal Bolt Center to Center	9.1 Inch 232 Millimeter
Length Thru Bore	2.795 Inch 71 Millimeter
Bolt Spacing Minimum	8.819 Inch 224Millimeter
Base to Center Height	3.5 Inch 88.9 Millimeter



NACHI BEARINGS TRAINING INDUSTRY

Bolt Spacing Maximum	9.449 Inch 240Millimeter
Bore	3.15 Inch 80 Millimeter