




NACHI BEARINGS TRAINING INDUSTRY

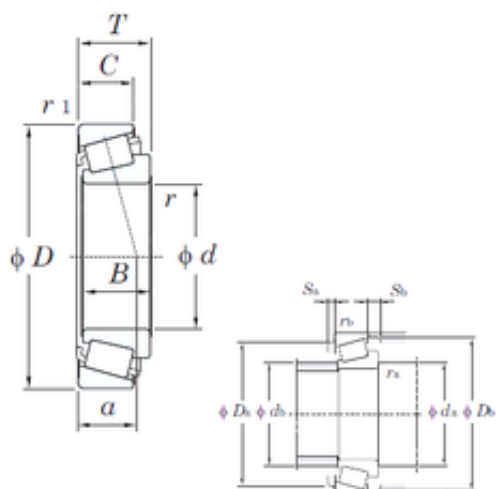

32 mm x 65 mm x 21 mm KOYO 322/32 tapered roller bearings

Bearing No. 322/32

322/32 Bearing 2D drawings and 3D CAD models

Size	32x65x22.25 mm
Bore Diameter	32 mm
Outer Diameter	65 mm
Width	22,25 mm
d	32 mm
D	65 mm
T	22,25 mm
B	21 mm
C	18 mm
a	16,3 mm
r min.	1 mm
r2 min.	1 mm
da min.	37,5 mm
da max	40 mm
Da min	55 mm
Da max.	59,5 mm
Db min.	61 mm
ra max.	1 mm
rb max.	1 mm
Weight	0,33 Kg
Basic dynamic load rating (C)	51,6 kN
Basic static load rating (C0)	57,7 kN
(Grease) Lubrication Speed	6200 r/min
(Oil) Lubrication Speed	8200 r/min
Calculation factor (e)	0,37



NACHI BEARINGS TRAINING INDUSTRY

Calculation factor (Y0)	0,88
Bearing No.	322/32
r(min)	1
r1(min)	1
Cr	64.5
C0r	57.7
Cu	8.45
Grease lub.	6200
Oil lub.	8200
a	16.3 mm
da(min)	37.5
db(max)	40
Da(max)	59.5
Da(min)	55
Db(min)	61
Sa(min)	2
Sb(min)	4
ra(max)	1
rb(max)	1
e	0.37
Y1	1.60
Y0	0.88
(Refer.) Mass(kg)	0.330