




## NACHI BEARINGS TRAINING INDUSTRY

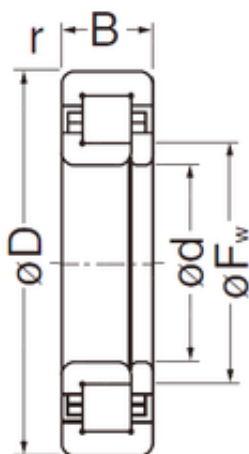

30 mm x 62 mm x 20 mm NACHI NUP2206EG cylindrical roller bearings

Bearing No. NUP2206EG

Size	30x62x20 mm
Bore Diameter	30 mm
Outer Diameter	62 mm
Width	20 mm
d	30 mm
Fw	37,5 mm
D	62 mm
B	20 mm
C	20 mm
r min.	1 mm
r1 min.	0,6 mm
Weight	0,295 Kg
Basic dynamic load rating (C)	49 kN
Basic static load rating (C0)	50 kN
(Grease) Lubrication Speed	9500 r/min
Configuration	Single Row
Enclosure	Open
Bore Type	Cylindrical Bore
Bore Size	30 mm
Outside Diameter	62 mm
Width	20 mm
Fillet Radius/Chamfer	1 mm
Inside Ring Outside Diameter	37.5 mm
r1	0.6 mm

NUP2206EG Bearing 2D drawings and 3D CAD models



## NACHI BEARINGS TRAINING INDUSTRY

Dynamic Load Rating	49,000 N
Static Load Rating	50,000 N
Limiting Speed - Grease	9,500 rpm
Limiting Speed - Oil	12,000 rpm
Radial Clearance	0.020 to 0.045 mm
db (min)	35 mm
db (max)	37 mm
dc (min)	40 mm
dd (min)	44 mm
Da (max)	56 mm
ra (max)	1 mm
ra1 (max)	0.6 mm