




NACHI BEARINGS TRAINING INDUSTRY

35 mm x 72 mm x 17 mm NTN 6207LLU deep groove ball bearings

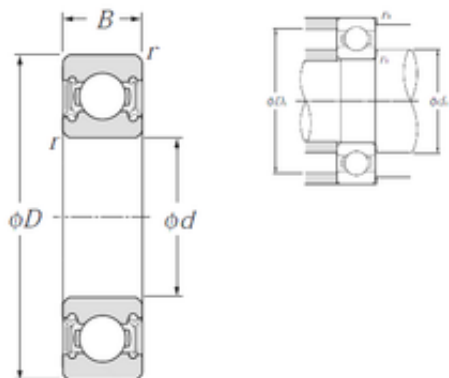

Bearing No. 6207LLU

6207LLU Bearing 2D drawings and 3D CAD models

Size	35x72x17 mm
Bore Diameter	35 mm
Outer Diameter	72 mm
Width	17 mm
d	35 mm
D	72 mm
B	17 mm
C	17 mm
r min.	1,1 mm
da min.	41,5 mm
da max	45 mm
Da max.	65,5 mm
ra max.	1 mm
Weight	0,288 Kg
Basic dynamic load rating (C)	25,7 kN
Basic static load rating (C0)	15,3 kN
Reference speed	6 300 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.285
EAN	4547359004663
Product Group	B00308
Enclosure	2 Seals



NACHI BEARINGS TRAINING INDUSTRY

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	35MM Bore; 72MM Outside Diameter; 17MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6207LLU/1E
Weight / LBS	0.63
Bore	1.378 Inch 35 Millimeter
Outer Race Width	0.669 Inch 17 Millimeter
Outside Diameter	2.835 Inch 72 Millimeter
bore diameter:	35 mm
static load capacity:	15300 N
outside diameter:	72 mm
precision rating:	ISO Class 0
overall width:	17 mm
finish/coating:	Uncoated



NACHI BEARINGS TRAINING INDUSTRY

bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	17 mm
snap ring included:	Without Snap Ring
outer ring width:	17 mm
internal clearance:	CN
maximum rpm (grease):	6300 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1.1 mm
dynamic load capacity:	25700 N
manufacturer product page:	Click here