




NACHI BEARINGS TRAINING INDUSTRY

110 mm x 240 mm x 80 mm FAG 2322-K-M-C3 + H2322 self aligning ball bearings

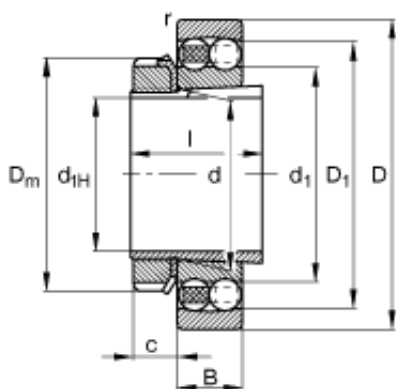

Bearing No. 2322-K-M-C3 + H2322

2322-K-M-C3 + H2322 Bearing 2D drawings and 3D CAD models

Size	100x240x80 mm
Bore Diameter	100 mm
Outer Diameter	240 mm
Width	80 mm
d_{1H}	100 mm
D	240 mm
B	80 mm
$B_{a \min}$	7 mm
c	21 mm
D_1	203 mm
$D_{a \max}$	226 mm
D_m	145 mm
d	110 mm
d_1	145,5 mm
$d_{a \max}$	124 mm
$d_{b \min}$	121 mm
l	105 mm
$r_{a \max}$	2,5 mm
	H2322 / Adapter sleeve
m	17,5 kg / Weight
m_1	2,78 kg / Weight, adapter sleeve
C_r	221000 N / Dynamic load rating (radial)
e	0,37



NACHI BEARINGS TRAINING INDUSTRY

Y_1	1,69
Y_2	2,62
C_{0r}	94000 N / Static load rating (radial)
Y_0	1,77
n_G	4300 1/min / Limiting speed
n_B	4600 1/min / Reference speed
C_{ur}	4400 N / Fatigue limit load, radial