




# NACHI BEARINGS TRAINING INDUSTRY

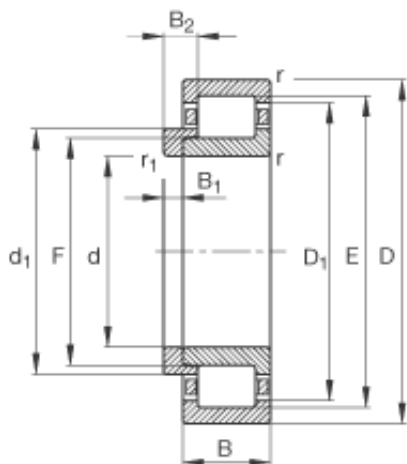

140 mm x 300 mm x 62 mm FAG NJ328-E-TVP2 + HJ328-E cylindrical roller bearings

Bearing No. NJ328-E-TVP2 + HJ328-E

NJ328-E-TVP2 + HJ328-E Bearing 2D drawings and 3D CAD models

Size	140x300x62 mm
Bore Diameter	140 mm
Outer Diameter	300 mm
Width	62 mm
d	140 mm
D	300 mm
B	62 mm
B <sub>1</sub>	15 mm
B <sub>2</sub>	25 mm
D <sub>1</sub>	251,7 mm
D <sub>a max</sub>	283 mm
d <sub>1</sub>	195,4 mm
d <sub>a max</sub>	176 mm
d <sub>a min</sub>	157 mm
d <sub>c min</sub>	198 mm
E	264 mm
F	180 mm
r <sub>1 min</sub>	4 mm
r <sub>a max</sub>	3 mm
r <sub>min</sub>	4 mm
s	5,2 mm / Axial displacement facility from central position
- HJ328-E / Designation, L-section ring	HJ328E / Designation, Lsection ring



## NACHI BEARINGS TRAINING INDUSTRY

$m$	20,5 kg / Weight
$m_1$	2,03 kg
$C_r$	790000 N / Dynamic load rating (radial)
$C_{0r}$	800000 N / Static load rating (radial)
$n_G$	2650 1/min / Limiting speed
$n_B$	2200 1/min / Reference speed
$C_{ur}$	124000 N / Fatigue limit load, radial