




NACHI BEARINGS TRAINING INDUSTRY

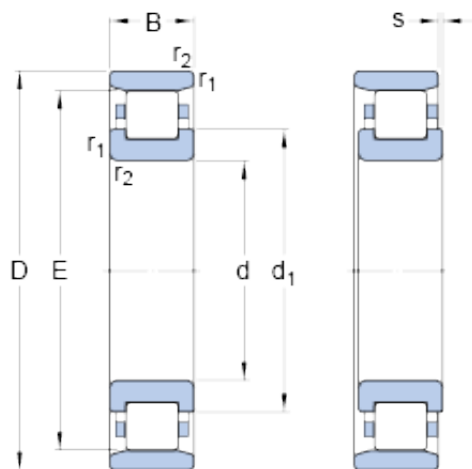

1700 mm x 2060 mm x 160 mm SKF 319286
thrust ball bearings

Bearing No. 319286

319286 Bearing 2D drawings and 3D CAD models

Size	2060x1700x160 mm
Bore Diameter	2060 mm
Outer Diameter	1700 mm
Width	160 mm
d	1700 mm
D	2060 mm
B	160 mm
d ₁	1832 mm
E	1960 mm
r _{1,2} - min.	7.5 mm
s	22.5 mm
d _a - min.	1728 mm
d _a - max.	1955 mm
D _a - min.	1975 mm
D _a - max.	2032 mm
r _a - max.	6 mm
Basic dynamic load rating - C	3690 kN
Basic static load rating - C ₀	9150 kN
Fatigue load limit - P _u	490 kN
Reference speed	160 r/min
Limiting speed	200 r/min
Calculation factor - k _r	0.03
d ₁	1832 mm
r _{1,2} min.	7.5 mm



NACHI BEARINGS TRAINING INDUSTRY

s max.	22.5 mm
d_a min.	1728 mm
d_a max.	1955 mm
D_a min.	1975 mm
D_a max.	2032 mm
r_a max.	6 mm
Basic dynamic load rating C	3690 kN
Basic static load rating C_0	9150 kN
Fatigue load limit P_u	490 kN
Calculation factor k_r	0.03
Limiting value e	0.2
Axial load factor Y	0
Mass bearing	902 kg